







536010



536011



53551034  
53551040



TECH INFO

Ref.		536010			536011			53551034 / 53551040					
↕ ... ↕		UHF 1	UHF 2 / BIII / DAB	174-254	UHF 1	UHF 2	BIII / DAB	UHF	BV	BIV	BIII/DAB		
← ... MHz ... →		MHz	470 - 694/790	470 - 694/790	174-254	470 - 694/790	470 - 694/790	174-254	470 - 694/790	614-694/790 <sup>(1)</sup>	470-590 <sup>(1)</sup>	470-614 <sup>(2)</sup>	174-254
 G↑	dB	28		26	28		26	28	27	27	26		
	 G↓	dB	0 ... 15		0 ... 15	0 ... 15		0 ... 15	0 ... 15	0 ... 15	0 ... 15		
		 V <sub>out</sub> dBµV	EN 60728-3 <sup>(3)</sup>	121	115	121	115	121		114	109	115	
 V <sub>out</sub> dBµV	DIN 45004B	114	109	114	109	114		111	105	111			
	EN 60728-3 <sup>(4)</sup>	111	105	111	105	111		111	105	111			
 N. F.	dB	9		5	9		5	9	10		5		
	 DC OUT Vdc/mA	Vdc	12 / 110			12 / 110			12 / 110				
 DC PASS	 DC OUT → DC IN	OFF	-				-						
	ON	mA	70	70	70	-	-	70	70	70	-		
 IP	 MIN ... MAX	-				-				23			
	°C	-				-				-5 ... +45			
 g	 mm	-				-				450			
	mm	-				-				120 × 130 × 40			

(1) Ref. 53551034

(2) Ref. 53551040




(3) IMD3 2tones -35dB



(4) IMD3 2tones -60dB

- Con una variación hasta 15°C sobre el margen de temperatura de funcionamiento, las características técnicas anteriores pueden variar.
- Com uma variação até 15°C sobre a margem de temperatura de funcionamento, as características técnicas anteriores podem variar.
- Ces caractéristiques peuvent changer, si la température ambiante dépasse de 15°C la température de fonctionnement spécifiée.

- These specifications may vary whenever the ambient temperature exceeds 15 °C the herein specified operating limits.
- Die angegebene Betriebstemperatur darf um ±15° überschritten werden.
- Con una variazione massima di 15 °C sopra la temperatura di esercizio, le specifiche di cui sopra possono variare.

- Przy zmianie do 15°C ponad lub poniżej zakresu temperatury pracy, powyższe dane techniczne mogą ulec zmianie.
- При температурных изменениях свыше 15°C относительно указанных пределов характеристики функционирования могут отличаться от табличных.



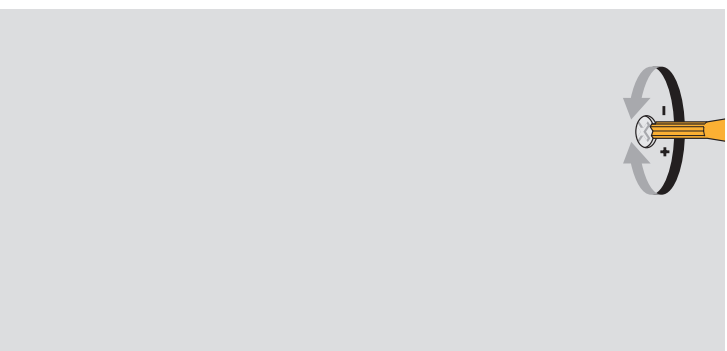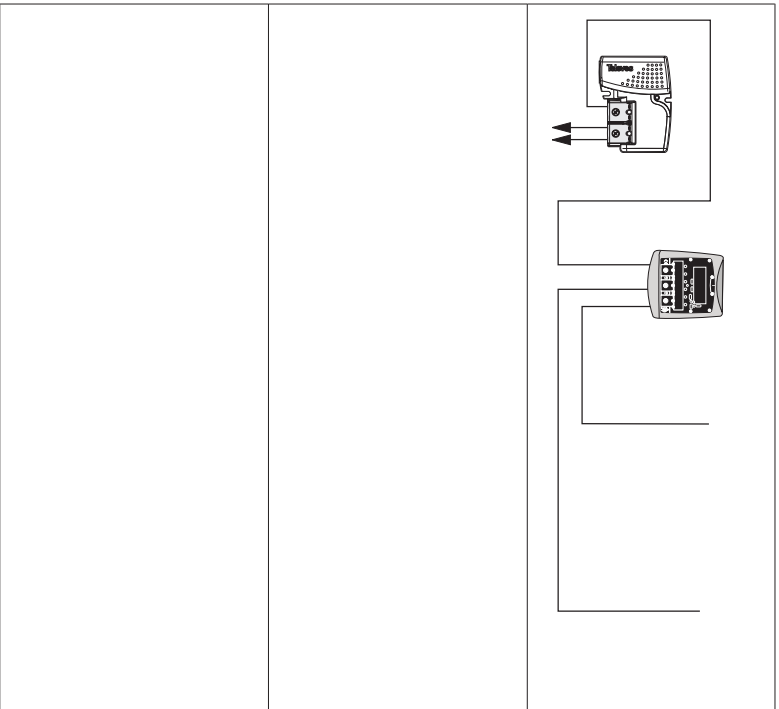

- El equipo cumple los requerimientos del marcado CE.
- The equipment complies with the CE mark requirements.
- Este equipamento está em conformidade com os requisitos da marcação CE.
- Le produit est conforme aux exigences du marquage CE.
- L'appareil satisfait à l'ensemble des exigences du marquage CE.
- Das Gerät entspricht den Anforderungen der CE-Kennzeichnung.
- Устaздeнe спрiянa вiдпoвiднo зoб'язкaм CE.
- "Устройства отвечает" требованиям CE.